


Product Data

**Mat, 2 Layer High
Temperature Mat**

Code : 5318 Series

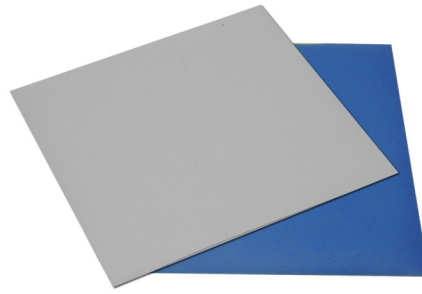

Properties

| | | | |
|------------------------------------|------------------------------------|------|-------------------------|
| RTT Resistance Top to Top | 4×10^7 to 6×10^8 | ohm | ANSI EOS/ESD S4.1 |
| RTG Resistance to Ground | 2×10^7 to 5×10^8 | ohm | ANSI EOS/ESD S4.1 |
| Static Decay Time (5 Kv - 50 v) | < 0.01 | sec | Fed Std 101 Method 4046 |
| Thickness | 0.060 +/- 0.02 | inch | Inches |
| Tensile Strength | 1000 | psi | ASTM D412 |
| Durometer | 60 | - | ASTM D2240 (Shore A) |
| Temperature (10 Mins) | 500 | °F | - |
| Chemical Resistance | Excellent | - | - |
| Solider Resistance | Excellent | - | - |
| Surface Texture | Smooth | | |

Color

| | |
|--------------|-----------------|
| Top Layer | Dark Blue, Grey |
| Bottom Layer | Black |

Standard Size

| | | |
|--------|--------|----|
| Width | 3 or 4 | ft |
| Length | 50 | ft |

Pro-Pack Materials Pte Ltd

Blk 970, Toa Payoh North, #04-18
Toa Payoh Industrial Estate
Singapore 318992

Tel : +65 63541511
Fax : +65 63541711
Email : sales@pro-pack.com.sg
Website : www.pro-pack.com.sg

Regional Offices :

Malaysia

Bold Pack Industries Sdn Bhd

Indonesia

PT Pro-Pack Industries

Thailand

Bold-Pack Materials (Thai) Co. Ltd

Philippines

Pro-Pack Materials (Philippines) Inc.

India

Pro-Pack Materials India Pvt Ltd

China

Pro-Pack Materials (Wuxi) Co., Ltd