


Product Data

Conductive Interlocking Anti-fatigue Mat

Code : 5318 Series

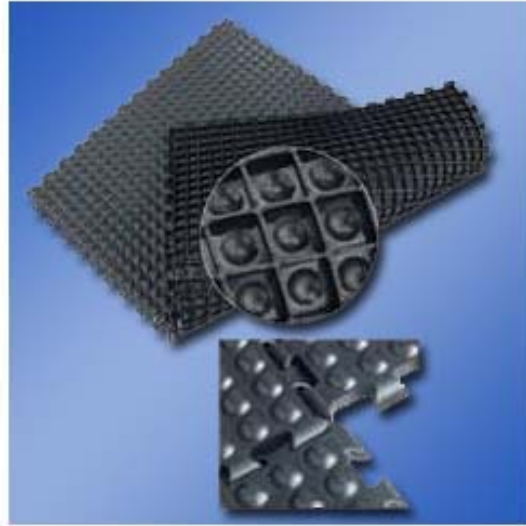

| | Properties | Units | Specification |
|------------------------------|--------------------------|----------------|----------------------|
| Basic Properties | Material | - | Polyurethane |
| | Colour | - | Dark Gray, Grey |
| | Weight | kg | 2.5 |
| | Length | Cm | 90 +/- 1% |
| | Width | Cm | 60 +/- 1% |
| | Thickness | mm | 15 |
| Mechanical | Intensity | Sh-A | 30 ~ 40 |
| | Density | Kg/cubic meter | 380 +/- 10% |
| | Compressibility | % | 50 |
| | Degree of Abrasion | cubic mm | 180 |
| | Tensile Strength | Mpa | 2 |
| | Elongation | % | 500 |
| | Crushing Strength | N/mm | 4 |
| Electrical Resistance | Stability (Anti-slip) | R/V | 10/11 |
| | Surface | Ohm | 1 x 10E5 ~ 5 x 10 E6 |
| Heat | The Lowest Point for use | ° C | 80 |
| | Available highest point | ° C | 120 |

Pro-Pack Materials Pte Ltd

Blk 970, Toa Payoh North, #04-18
Toa Payoh Industrial Estate
Singapore 318992

Tel : +65 63541511
Fax : +65 63541711
Email : sales@pro-pack.com.sg
Website : www.pro-pack.com.sg

Regional Offices :

Malaysia
Bold Pack Industries Sdn Bhd

Indonesia
PT Pro-Pack Industries

Thailand
Bold-Pack Materials (Thai) Co. Ltd

Philippines
Pro-Pack Materials (Philippines) Inc.

India
Pro-Pack Materials India Pvt Ltd

China
Pro-Pack Materials (Wuxi) Co., Ltd