


Product Data

**Mat, 2 Layer Static
Dissipative**

Code : 5318 Series

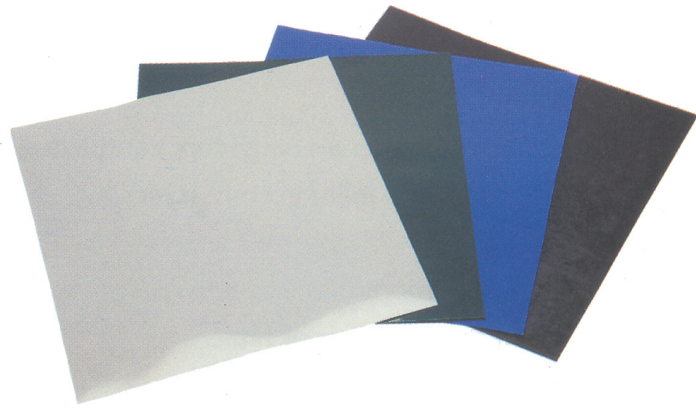

Material

Top Layer	Static dissipative rubber
Bottom Layer	Conductive rubber
Surface	Non shinning, shinning

Colour

Top Layer	Green, Grey, Sky Blue, Brown
Bottom Layer	Black

Electrical Properties

Tensile Strength	Width	105	Kg/cm ²	KS M 6518-91
	Length	114		
Elongation	Width	380	%	
	Length	370		
Hardness	Length	64	HS	
Tear Strength (B)	Width	31	Kg/cm	
	Length	37		
Temperature Resistance		Max.130	°C	
Surface Resistivity	Black	10 3 - 10 5	Ohm/sqmt	ASTM D257
	Colour	10 7 - 10 8	Ohm/sqmt	
Volume Resistivity	Black			
Static Decay 5 Kv - 500v		<0.01	Sec	FTS 101C

Size

Length	10, 20	m
Width	60, 90, 100 , 120	cm
Thickness	2, 3	mm

Pro-Pack Materials Pte Ltd

Blk 970, Toa Payoh North, #04-18
Toa Payoh Industrial Estate
Singapore 318992

Tel : +65 63541511
Fax : +65 63541711
Email : sales@pro-pack.com.sg
Website : www.pro-pack.com.sg

Regional Offices :

Malaysia
Bold Pack Industries Sdn Bhd

Indonesia
PT Pro-Pack Industries

Thailand
Bold-Pack Materials (Thai) Co. Ltd

Philippines
Pro-Pack Materials (Philippines) Inc.

India
Pro-Pack Materials India Pvt Ltd

China
Pro-Pack Materials (Wuxi) Co., Ltd